




DIC-201

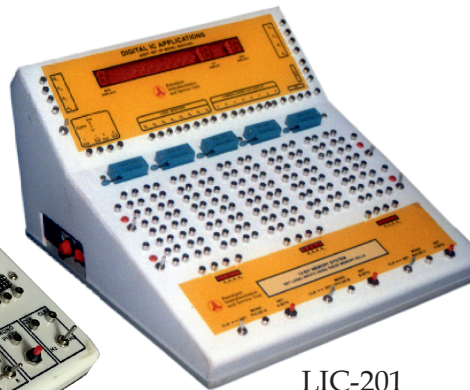

LIC-201

**General Specifications:**

Rated Input: 220 V/50 Hz  
or 110 V/60 Hz

Power consumption: <30 W

Cabinet: Acrylic with metal base

High-low voltages: 5 & 0

Connectors: 2 mm-2 mm brass pin with 6/9/12 inch wire lengths



LGT-1912



FAS-2004

Model	Specifications
DIC-201	BCD & CA display, LED logic monitors (8), mono & clock pulse, with breadboard suitable for all logic circuits
LIC-201	CD & CA display, LED logic monitors, mono & clock pulse (3), with IC ZIF socket suitable for all logic circuits
LGT-1912	Basic logic gate experiments suitable for construction of basic gates using universal gate ICs
FAS-2004	Construction of half/full adder and subtractor using logic ICs with logic monitors (4) and High-low inputs (4)

For customization mail us at [labexperiments@kamaljeeth.net](mailto:labexperiments@kamaljeeth.net)



**KAMALJEETH INSTRUMENTS**

ESTD. 1990

Address: No. 610, 5th main, 8th cross Tatanagar, Bangalore - 560092, INDIA

Website: [www.kamaljeeth.net](http://www.kamaljeeth.net), Email: [labexperiments@kamaljeeth.net](mailto:labexperiments@kamaljeeth.net)

3 years manufacturing warranty